

A true 'half round' gutter profile with increased flow rates over existing half round – and a unique jointing clip making installation easier than ever!

- Fast, clean and easier to install
- Available in 125mm – flow capacity 1.5 litres per second
- Use with existing 75mm Classical round downpipes
- Double spigot design, so fewer fittings required
- Unique jointing clip enables joint to be completed in only minutes
- Higher flow capacity than existing 150mm 'half round' standard.

Classical Express Plus

- The Classical Express system is available in the factory applied top coat – (semi gloss black) for immediate installation.


(See opposite for coating details).

Classical Express benefits

- True half round profile gives significantly higher flow rates than traditional half round
- System able to cope with increased rainfall attributed to climate change

- Joint can be completed in a matter of minutes and in any weather condition
- Reduces the time and cost for scaffolding which may have to be hired
- Reduces the total installed time
- Double spigoted design means fewer fittings so ordering, delivery, and stocking are much simpler
- Competitively priced against other high flow metal systems
- Flexibility of clip jointing can allow some deflection.

Classical Express clip assembly instructions

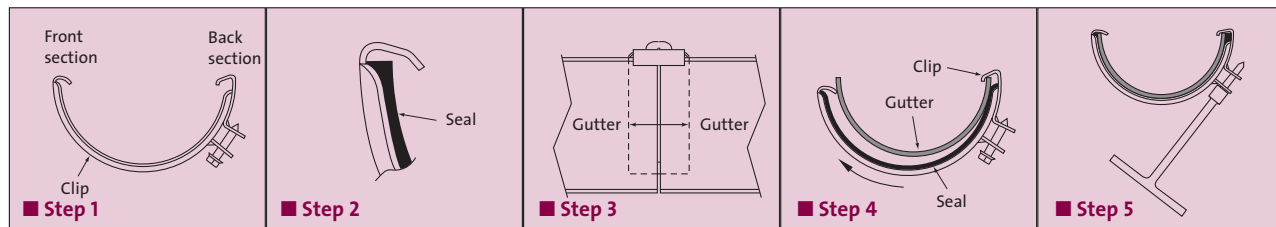

Slacken bolt to the fullest extent.

Locate the gasket centrally within the clip assembly ensuring the seal ends are positioned within the locating lugs.

Locate the back section on the rear gutter edge and ensure clip is positioned equal distant to each end of the gutter.

Note: In the case of fittings, use the joint location lugs as a guide.

Bring the front section forwards and clip onto the front edge of the gutters. Re-check the position and bolt up tight.

Typical appearance of assembled joint.